




## PRODUCT DATA

<b>Order code</b>	LM-P6-W4
<b>LED Type</b>	2835
<b>Luminous efficacy</b>	170 lm/W
<b>Typical luminous flux, lm</b>	102 lm
<b>Max. Power per module</b>	0.6 W
<b>Ingress protection</b>	IP 67
<b>Colometric data, CCT</b>	7200 K (upon request other options are available)
<b>Module Size (L x W x H), mm</b>	65 x 15 x 10
<b>Maximum modules per chain</b>	50 pcs.
<b>Mounting</b>	3M Double-sided adhesive tape
<b>Operating temperature</b>	-20°C ~ +50°C
<b>L80 lifetime</b>	> 60.000 hours (based on IES TM-21-11)
<b>Warranty</b>	5 years limited

**POLARIS 6** **5** year warranty

## APPLICATIONS

Typically used in small to medium size signage  
 Can depth/returns: 70 - 150 mm  
 Shallow to medium depth light boxes and letters

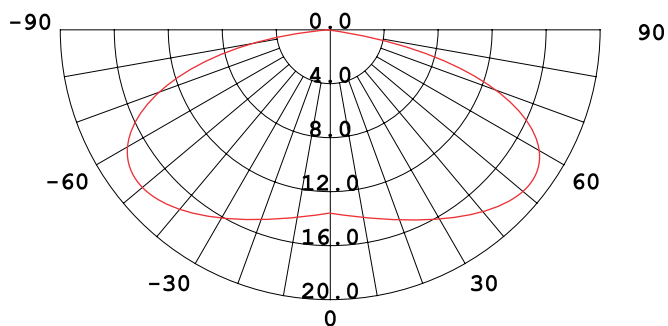

## LOAD CHART

**Standard power supply**      **Maximum module quantity**

20 W	32
35 W	56
60 W	98
100 W	164
150 W	240

## SHIPPING INFORMATION

<b>Inner box quantity</b>	50
<b>Carton box quantity</b>	1500
<b>Package gross weight</b>	25.3 kgs
<b>Carton box dimensions</b>	43.5 x 43 x 34.5 cm



This product is only suitable for connection to dedicated Class 1 or Class 2 power supplies rated DC24V (± 5%)

- This product is not to draw a total wattage of greater than the secondary (output) rating of the power supply
- Double-sided adhesive tape is for placement of the module only and additional fixation is needed
- This product is suitable for use in dry, damp and wet locations, but not suitable for submersed application
- Specifications of the products might change without further notice. Make sure to use the most recent