
Features:

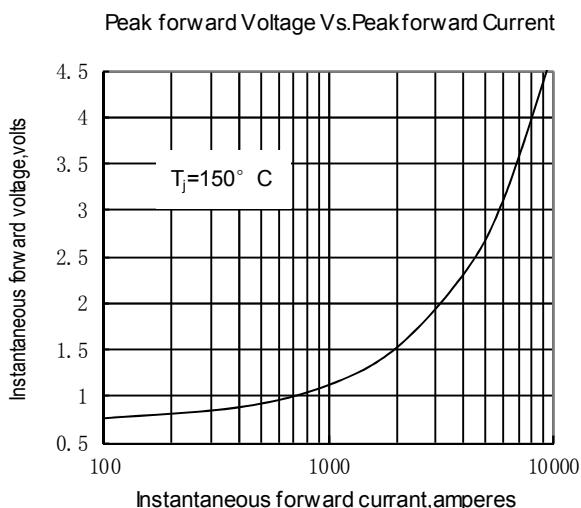
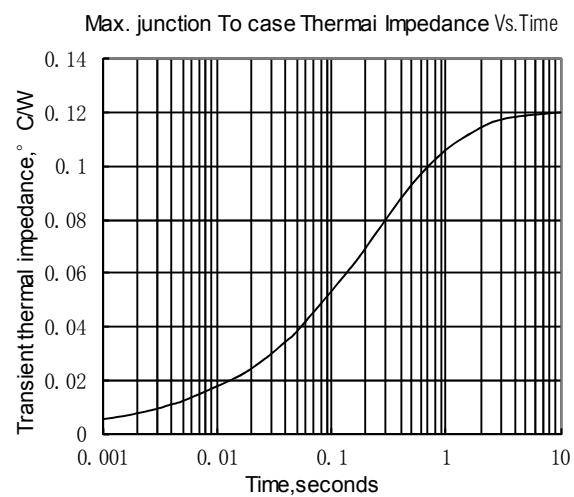
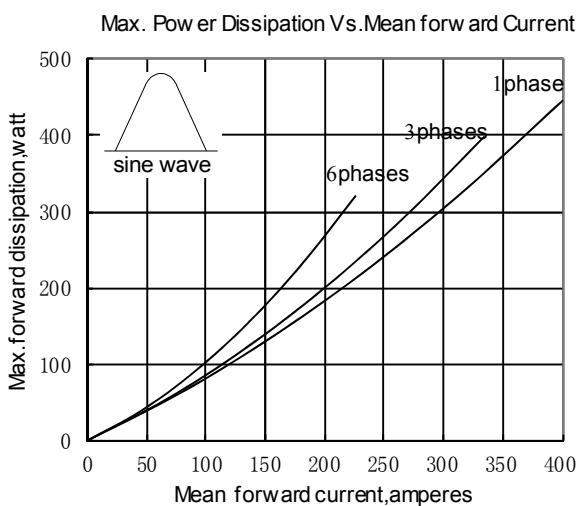
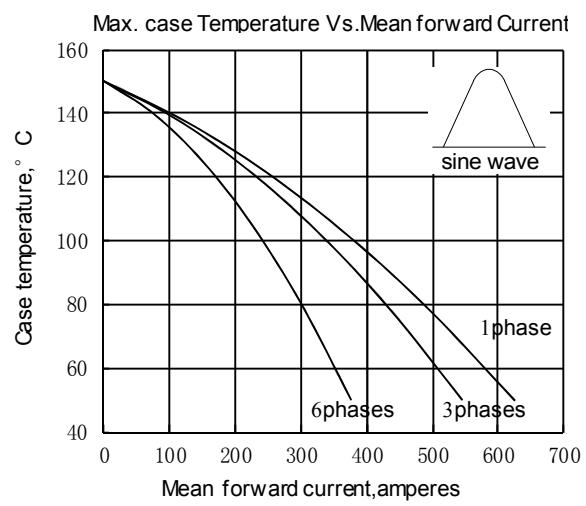
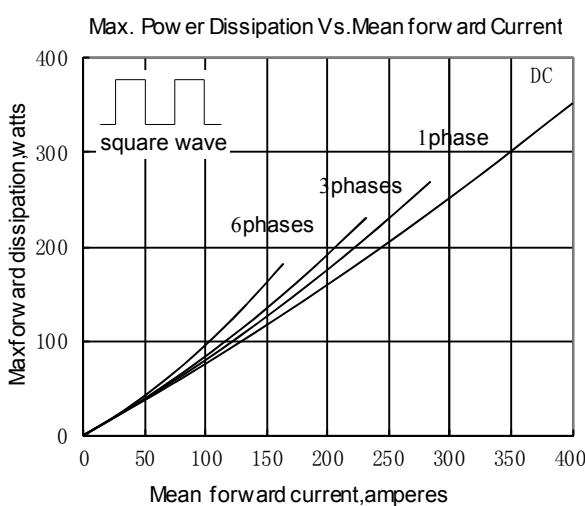
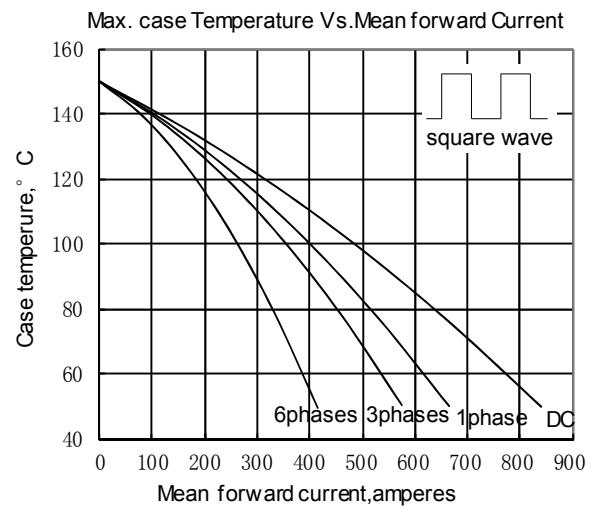
- Isolated mounting base 2500V~
- Pressure contact technology with Increased power cycling capability
- Space and weight saving

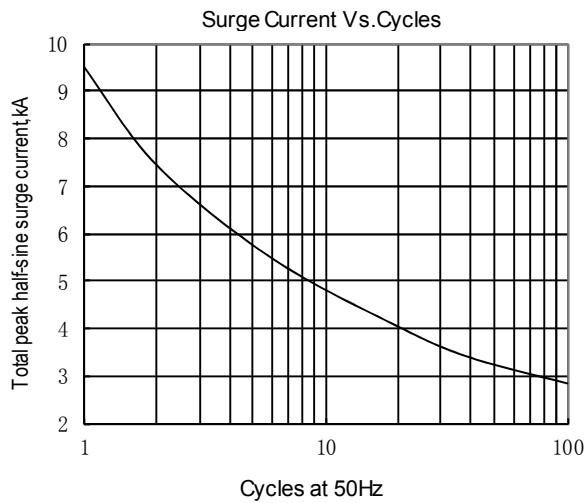
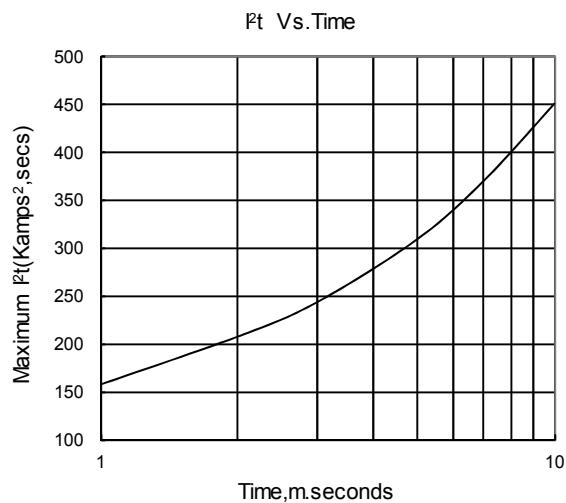
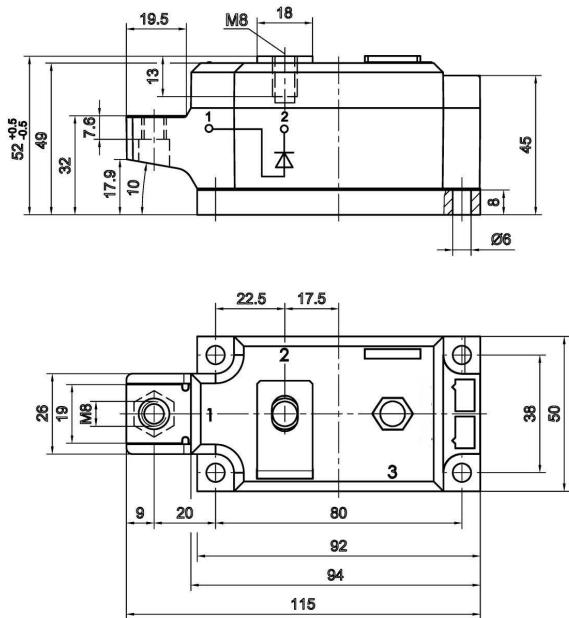
Typical Applications

- Various rectifiers
- DC supply for PWM inverter

V_{RSM}	V_{RRM}	Type & Outline
900V	800V	MDx380-08
1100V	1000V	MDx380-10
1300V	1200V	MDx380-12
1500V	1400V	MDx380-14
1700V	1600V	MDx380-16
1900V	1800V	MDx380-18

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, $T_c=100^{\circ}C$	150			380	A
$I_{F(RMS)}$	RMS forward current		150			596	A
I_{RRM}	Repetitive peak current	at V_{RRM}	150			20	mA
I_{FSM}	Surge forward current	10ms half sine wave	150			9.8	KA
I^2t	I^2T for fusing coordination	$V_R=0.6V_{RRM}$				451	$A^2s \times 10^3$
V_{FO}	Threshold voltage		150			0.72	V
r_F	Forward slop resistance					0.40	$m\Omega$
V_{FM}	Peak forward voltage	$I_{FM}=1100A$	25			1.45	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine Single side cooled per chip				0.120	$^{\circ}C /W$
$R_{th(c-h)}$	Thermal resistance case to heatsink	At 180° sine Single side cooled per chip				0.04	$^{\circ}C /W$
V_{iso}	Isolation voltage	50Hz,R.M.S,t=1min, $I_{iso}:1mA(max)$		2500			V
F_m	Terminal connection torque(M8)				12.0		$N \cdot m$
	Mounting torque(M6)				6.0		$N \cdot m$
T_{stg}	Stored temperature			-40		125	$^{\circ}C$
W_t	Weight				550		g
Outline	M03Y						


Fig.1

Fig.2

Fig.3

Fig.4

Fig.5

Fig.6


Fig.7

Fig.8
Outline:

M03Y
