


Model AUT30 and AUT30M Automotive 30A Current Testers

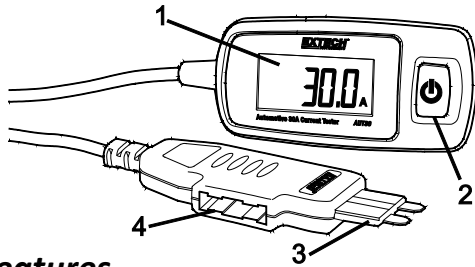

Features

- Large digit LCD display
- For use on standard ATC blade size fuse circuits (AUT30) or mini-blade size fuse circuits (AUT30M)
- Measuring range to 30A/48VDC (10 sec. test time max.)

Safety

WARNING: Risk of Electrocutation. Keep hands and fingers on the body of the probe and away from the blade tips.

CAUTION: Read, understand and follow Safety Rules and Operating Instructions in this manual before using meter.


Do not attempt to repair this unit. There are no user serviceable parts.


Do not expose unit to extreme temperatures/high humidity


Do not use the unit if it is wet or damaged

Do not apply more than the rated voltage between the probe tip and ground.

Do not operate with the case open

 This symbol, adjacent to another symbol or terminal, indicates the user must refer to the manual for further information.

 This symbol, adjacent to a terminal, indicates that, under normal use, hazardous voltages may be present

 Double insulation

Specifications

Range	0 to 30A DC / 48V DC
Resolution	10mA
Accuracy	± (2.0% of reading + 2 digits)
Detection distance	<0.2"
Operating Temperature	0 to 50°C (32 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Altitude	2000 meters (7000 ft.) maximum
Relative Humidity	80% up to 31°C (88°F), decreasing to 50% at 50°C (122°F)
Battery	1 x 'A23G' 12V battery
Dimensions/Weight	159 x 25mm (6.25 x 1") / 42g (1.5oz.)
Cable length	71cm (2.3 ft.)

Operating Instructions

1. With the vehicle ignition **OFF**, remove the fuse from the circuit to be tested and set it aside.
2. Insert the meter's fuse blades (3) into the jack from where the fuse was removed.
3. Insert the removed fuse into the meter's fuse jack (4).
4. Press the meter's On/Off button (2)
5. Operate the circuit under test for **up to 10 seconds only**; the LCD (1) will display the measured current.
6. When finished press the On/Off button to turn off the tester.
7. **WARNING!** The Fuse blade may become hot during testing. Allow to cool before removing. **Do not** test > 10 seconds.

BATTERY INSTALLATION

1. To replace the battery, remove the screw from the back of the unit and remove the cover.
2. Insert one 12V 'A23G' battery (observe polarity).
3. Replace the battery cover

NOTE: If the meter does not work properly, check the battery to ensure that it's fresh and properly inserted.

Battery Safety

Never dispose of batteries in a fire; batteries may explode or leak.



Never dispose of used batteries or rechargeable batteries in household waste. As consumers, users are legally required to take used batteries to appropriate collection sites, the retail store where the batteries were purchased, or wherever batteries are sold.

Disposal: Do not dispose of this instrument in household waste. The user is obligated to take end-of-life devices to a designated collection point for the disposal of electrical and electronic equipment.

Copyright © 2013-2017 FLIR Systems, Inc.

All rights reserved including the right of reproduction in whole or in part in any form
ISO-9001 Certified

www.extech.com